# ALP2A

Parti accessorie a corredo della pompa standard: linguetta (codice 522067).
Monta flangia 82-2 (A) secondo norma SAE J744c.
Le porte standard "D" e "d" sono lavorate secondo la specifica SAE J1926/1 (ISO 11926-1) relativa a porte filettate con tenuta O-ring.

*Accessories supplied with the standard pump: key (code 522067).*
*Mounting flange 82-2 (A) in compliance with SAE J744c.*
*"D" and "d" standard ports are machined in compliance with threaded port with O-ring seal in truncated housing SAE J1926/1 (ISO 11926-1).*

MANDATA
*OUTLET*

ASPIRAZIONE
*INLET*

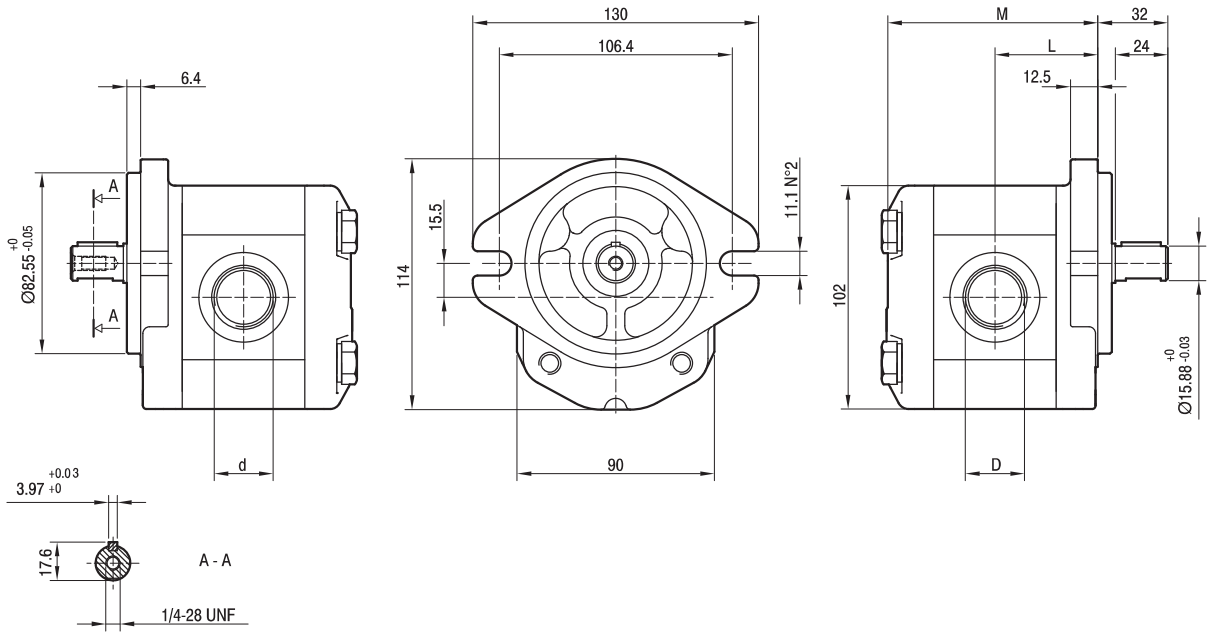


| TIPO *TYPE* | CILINDRATA *DISPLACEMENT* | PORTATA a 1500 giri/min *FLOW at 1500 rev/min* | PRESSIONI MASSIME *MAX PRESSURE* | | | VELOCITÀ MASSIMA *MAX SPEED* | DIMENSIONI *DIMENSIONS* | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | $P_1$ | $P_2$ | $P_3$ | | L | M | d | D |
| | $cm^3$/giro [$cm^3$/rev] | litri/min [litres/min] | bar | bar | bar | giri/min [rpm] | mm | mm | | |
| ALP2A-**D**-6 | 4,5 | 6,4 | 250 | 270 | 290 | 4000 | 45,5 | 93,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-9 | 6,4 | 9,1 | 250 | 270 | 290 | 4000 | 47 | 96,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-10 | 7,0 | 10,0 | 250 | 270 | 290 | 4000 | 47,5 | 97,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-12 | 8,3 | 11,8 | 250 | 270 | 290 | 4000 | 48,5 | 99,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-13 | 9,6 | 13,7 | 250 | 270 | 290 | 4000 | 49,5 | 101,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-16 | 11,5 | 16,4 | 230 | 250 | 270 | 4000 | 51 | 104,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-20 | 14,1 | 20,1 | 230 | 250 | 270 | 3200 | 53 | 108,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-22 | 16,0 | 22,8 | 210 | 225 | 240 | 2800 | 54,5 | 111,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-25 | 17,9 | 25,5 | 210 | 225 | 240 | 2500 | 56 | 114,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-30 | 21,1 | 30,1 | 180 | 195 | 210 | 2200 | 58,5 | 119,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-34 | 23,7 | 33,7 | 180 | 195 | 210 | 2000 | 60,5 | 123,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-37 | 25,5 | 36,4 | 170 | 185 | 200 | 1800 | 62 | 126,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-40 | 28,2 | 40,1 | 170 | 185 | 200 | 1800 | 64 | 130,5 | 7/8-14 UNF | 1 1/16-12 UNF |
| ALP2A-**D**-50 | 35,2 | 50,2 | 140 | 155 | 170 | 2000 | 69,5 | 141,5 | 7/8-14 UNF | 1 5/16-12 UNF |

Nel caso di funzionamento a pressioni elevate e intermittenti è possibile una riduzione della resistenza a fatica del corpo.
*A reduction of body's fatigue strength may occur if the pump is working at elevated and intermittent pressures.*