



LEIDING MONTAGE SMOOR-TERUGSLAGKLEPPEN



CARATTERISTICHE - HYDRAULICS FEATURES


Grandezza Size	01	02	03	04	05
Press. max Max pressure (bar)	350	350	350	320	300
Portata max da 2 verso 1 Max flow from 2 to 1 (l/min)	30	40	50	80	110
Portata max da 1 verso 2 Max flow from 2 to 1 (l/min)	35	50	90	140	180
Pressione d'apertura Cracking pressure (bar)	0,5	0,5	0,5	0,5	0,5

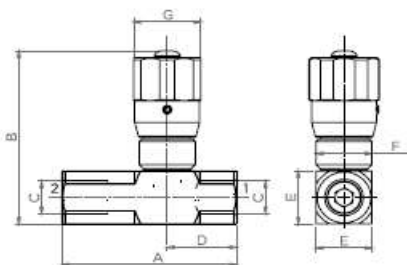

Materiali:
Corpo in acciaio zincato, parti interne in acciaio trattato termicamente.

Materials:
Zinc plated steel body, hardened steel inner parts.

PRESSIONE/PORTATA - PRESSURE/FLOW

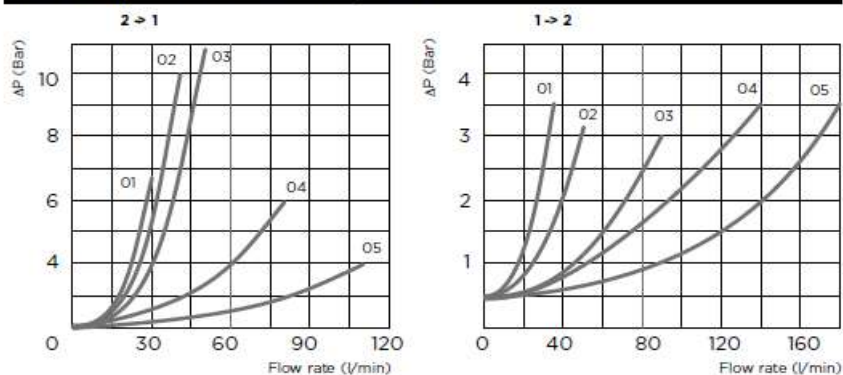

DIMENSIONI E PESI - EXTERNAL DIMENSIONS AND WEIGHTS

Dimensione Dimension	A	B	C BSPP	D	E	F	G	Peso Weight (Kg)
01	75	82	1/4	29	25	M25x1,5	31,5	0,42
02	78	82	3/8	32,5	25	M25x1,5	31,5	0,39
03	93	88	1/2	33,5	30	M25x1,5	31,5	0,60
04	110	116	3/4	44,5	40	M35x1,5	45	1,42

OMSCHRIJVING

Artikel NR.
VRFU-1/4
VRFU-3/8
VRFU 1/2
VRFU 3/4

Artikel NR.

CC.085155
CC.085190
CC.085130
CC.085170

Bouwgrootte/Dimension

01
02
03
04